


4 Wire Door Camera Manual



[KC-S81MU]

Manual for Operation and Installation



- Wide angle color camera
- White LED for night vision
- Video and interphone to the indoor monitor
- Door lock release

KOCOM CO.,LTD.

Thank you very much for purchasing KOCOM product. please read this manual thoroughly to ensure correct usage, before operation



Scan QR for video instructions






Components of Product

■ KC-S81MU

■ Wall hanger frame

■ Sun visor (Option)



■ Screws

Screw x 1ea

"L" Wrench

Mounting screw x 3ea

Plastic expansion pipe x 3ea

■ Wire



4Pin cable for camera x 1ea




3Pin cable for door opener x 1ea

Product Specifications


Specification	KC-S81MU
Power Source	DC +10V~15V (Power from monitor)
Power Consumption	MAX 2.8W
Operating Temperature	-10℃ ~ +50℃
Mount Type	Surface mount
Field of View	Diagonal 120 °
Dimension	70(W) x 125(H) x 21(D) mm

Door Camera Installation

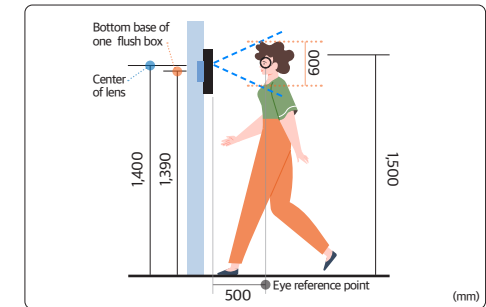

■ Camera installation location

- Standard installation point is 1,400mm above the floor. In this case, camera lens itself will be placed at around 1,390mm above the floor.

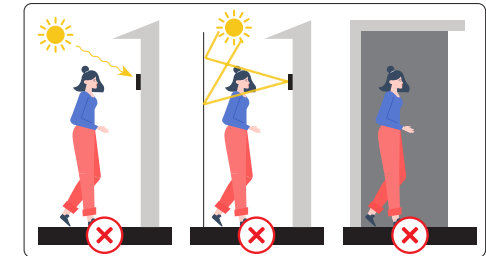

■ Caution

- Avoid installing camera under direct sunlight.
- Avoid backlight on the visitor's face, which make identification difficult.
- Avoid installing camera in places such as the following picture.
 - (1) Bright sunlight as background
 - (2) Reflective wall or material under direct sunlight
 - (3) Enclosed place without light source

Warranty

KC-S81MU Y0712

To receive after sales service, have the following ready when you contact our branches.

1. Name of the product.
2. Model number of the product.
3. The area of problem.
4. Phone number and address at which you can be contacted.

Warranty Card



PRODUCT	
MODEL	KC-S81MU
DATE PURCHASED	
WARRANTY PERIOD	
AGENCY	
AGENCY ADDRESS	

KOCOM Warranties the original purchaser of this product as follows.

- 1) This product is produced under strict quality control and inspection procedures.
- 2) If this product breaks down during proper use as a result of product defect, KOCOM will repair it within one year from date of purchase free of charge.
- 3) The following cases will be subject to charge, even during warranty period :
 - a. Breakdown during transport, or through careless treatment, by consumer.
 - b. Breakdown caused by unauthorized repair, or system modification.
 - c. Breakdown caused by natural disaster or power disorder.

Name of Each Part

■ KC-S81MU

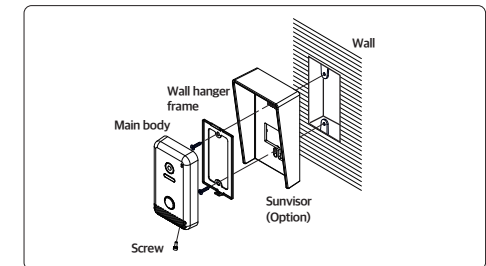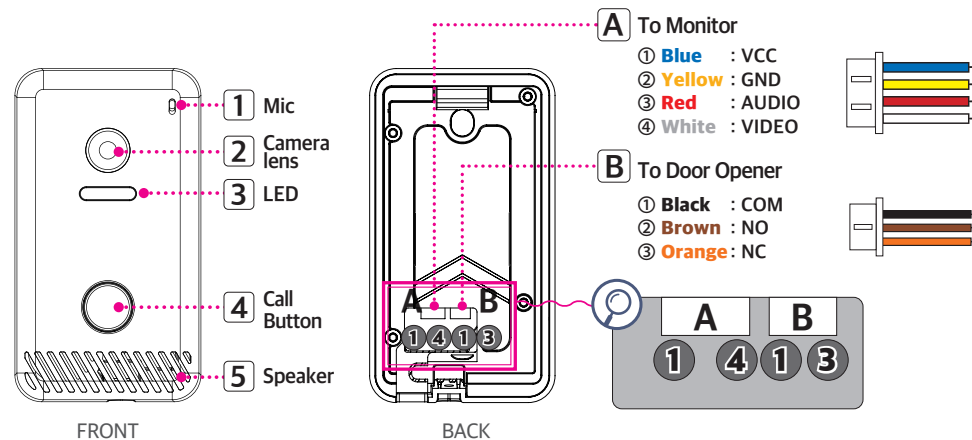


- 1) Install metal wall hanger frame on type 1 box or on the wall with attached screws.
- 2) Connect wiring to terminal on the back of door camera referring to product connection diagram.
- 3) Hang door camera on metal wall hanger frame and fix door camera on metal wall hanger frame using attached screw.

Avoid heavy rain directed to the product which can cause damage since it is not waterproof.

Wiring Connection

■ Wiring diagram of between indoor station and Door camera

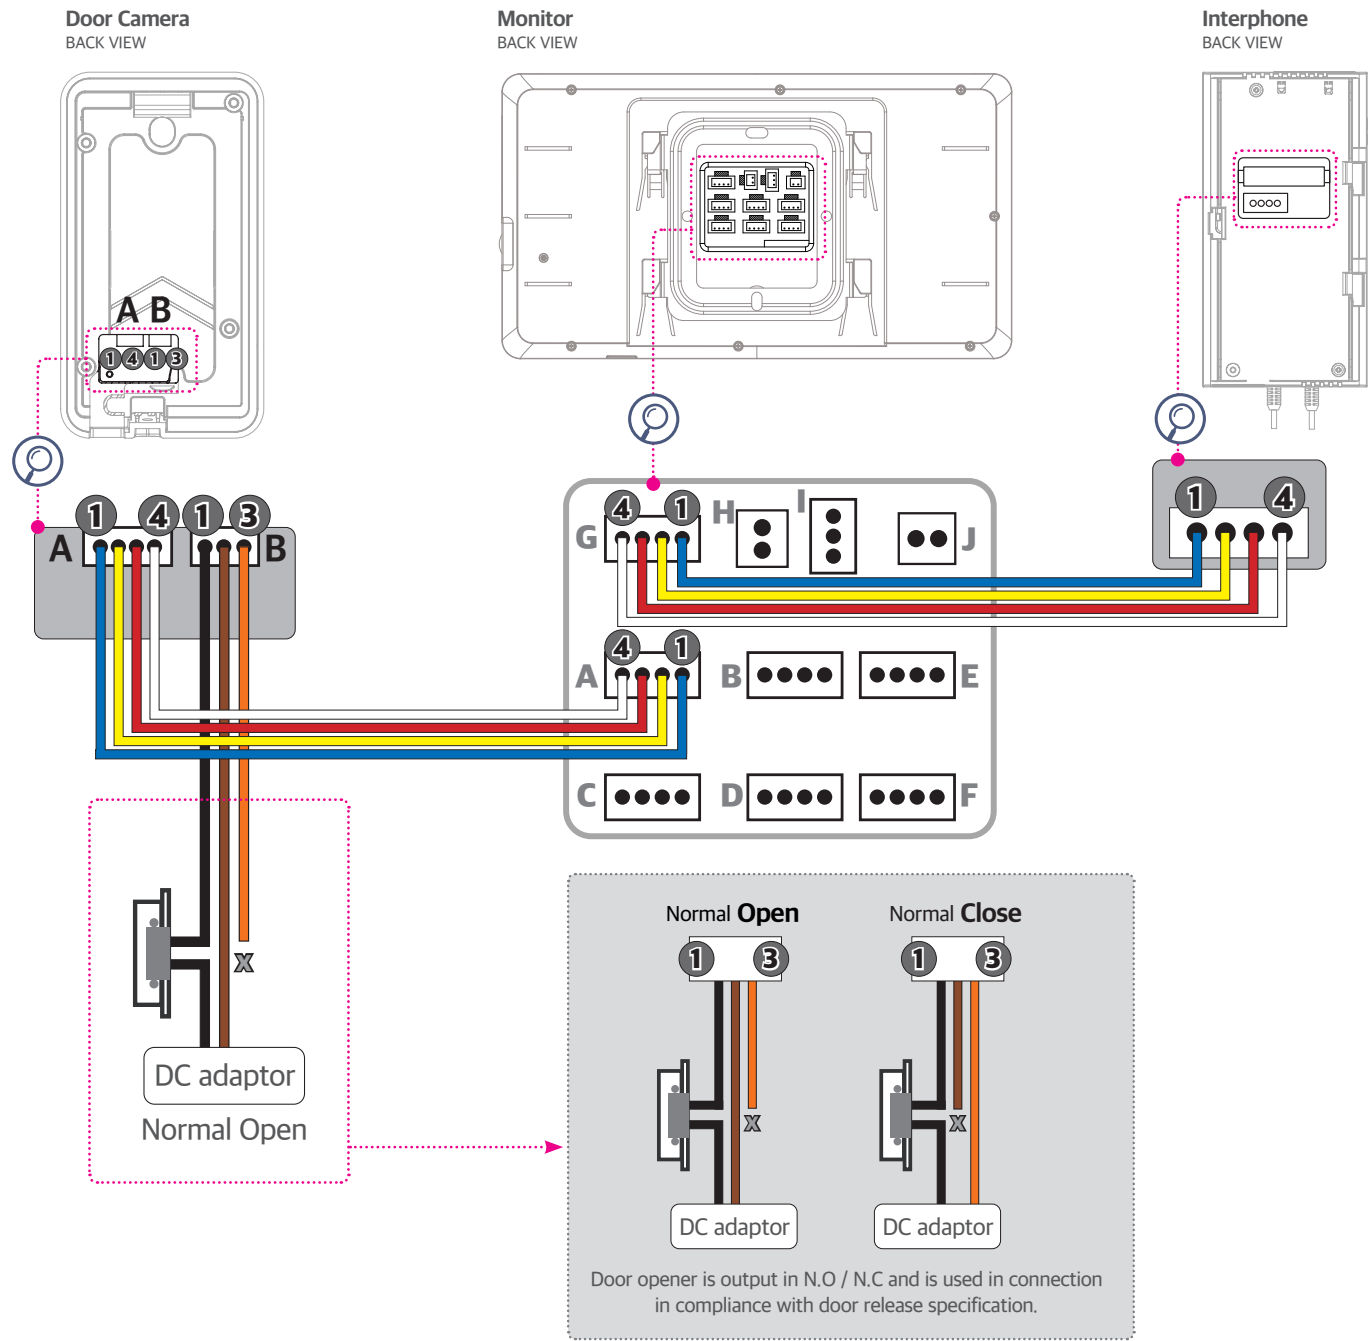

How to operate _ Instruction for operating

■ Call and Communication from door camera & Door open

