




KOCOM

IOT SMART HOME IP VIDEOPHONE

KCV-S701IPOE ^{NEW}

- 7" Full touch color LCD Monitor
- Applied graphic user interface(GUI)
- Fully digital system
- Power over ethernet(PoE)
- Share access
- Expandible up to 4 monitors, 2 door cameras and 2 CCTV cameras
- Auto still image capture(MAX. 50 cuts)
- 'DO NOT DISTURB' and 'ABSENT MODE' available
- Answer the door from anywhere with mobile app(KOCOM Home)

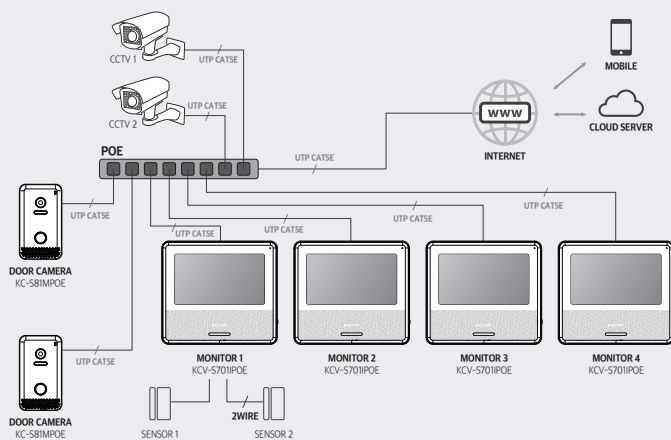

WIRING DIAGRAM**SPECIFICATIONS**

Display	7 inch color LCD
Power source	PoE DC48V (IEEE 802.3af)
Power consumption	3W(±20%)(on Stand by), 7W(±20%)(Full load)
Wiring	LAN: UTP Cat 5e or higher
Communication type	Handfree type
Mount type	Surface mount
Dimension (mm)	197(W) X 176(H) X 23(D) mm

COLOR**CONNECTABLE PRODUCT**

IOT SMART HOME DOOR CAMERA

KC-S81MPOE **NEW****PRODUCT FUNCTION**

- 1 Mega pixel
- White LED for visotor recognition at night
- Call and video communication with Monitor
- Doorlock interface

SPECIFICATIONS

Power source	PoE DC48V (IEEE 802.3af)
Power consumption	3W(Max)
Wiring	LAN: UTP Cat 5e or higher
Body material	Metal A/L
Mount type	Surface mount
Camera angle	Diagonal 110°
Dimesion	70(W) x 125(H) x 21(D)mm

IOT SMART HOME POE SWITCH **NEW****AI PoE Switch (4 Port / 8 Port)****SPECIFICATIONS (4 Port)**

I/O Interface	
Power source	Input : AC 100-240V, 50/60Hz
Ethernet	4Port 10/100Mbps PoE+2Port 10/100Mbps Ethernet Uplink
Performance	
Bandwidth	1.2Gbps
Throughput	0.8928Mpps
Packet Buffer	448K
MAC Address	1K
Jumbo Frame	2Kbytes
Transfer Mode	Store and forward
MTBF	100000hour

SPECIFICATIONS (8 Port)

I/O Interface	
Power source	Input : AC 100-240V, 50/60Hz
Ethernet	8Port 10/100Mbps PoE+2Port 10/100Mbps Ethernet Uplink
Performance	
Bandwidth	2Gbps
Throughput	1.488Mpps
Packet Buffer	448K
MAC Address	2K
Jumbo Frame	2048bytes
Transfer Mode	Store and forward
MTBF	100000hour